# Ensuring Real-Time Data Integrity in Networked Applications

The DDS standard can be used to guarantee the integrity of many types of embedded systems, including building controls.

oday's embedded systems are becoming increasingly complex. Applications are becoming more distributed and individual systems (nodes) are becoming more heterogeneous. Additional complexity is added with real-time and dynamically changing data requirements. Just to make the problem even more interesting, systems are required to enable seamless access to the data they contain through a variety of methods. Low-level messaging, publish/subscribe, data storage and SQL, and Web service technologies are all expected to be fully integrated, scalable, and upgradeable in today's distributed application.

This article will describe how a dataoriented approach enables integration of the different communication and data storage models.

### **Data-Centric Networks**

Figure 1 depicts the hypothetical problem to be solved using this data-oriented approach. The goal in this example is to maintain the temperature in many buildings, using embedded controllers each hooked to a number of sensors. Each of these sensors and control processes are connected through a transport mechanism such as Ethernet, shared memory, or bus backplane technologies.

Basic protocols such as TCP-UDP/IP or higher-level protocols such as HTTP can be used to provide standardized communication paths between each of the nodes. To achieve data integrity and failover capabilities, multiple controllers and sensors can be deployed in each building. Additionally, depending on the size of the building, multiple controllers each with appropriate backups could be distributed for the different zones. Controllers within a building need to collaborate, and all data collected from the various sensors is stored real-time in Web-accessible databases. The external access and monitoring applications should be able to receive realtime updates from any sensor as well as issue commands to the various controllers, ensuring that a nice tropical temperature is maintained. This simply stated example is surprisingly complex, containing

many elements of real-time messaging, data integrity and failover capabilities, integration with databases, Web services, as well as scalability and modularity concerns.

### Data Model

In order to simplify this example, we will only focus on the data the sensors send to their controller and how it can be distributed throughout the entire system. The first step in a data-centric approach is to carefully describe the data format in a standards-based way, either IDL or XML, and give it a "Topic" name. Topics are the element of the Data Distribution Service (DDS) middleware standard that identify the data objects and provide the basic connection between publishers and subscribers. Subscribers - in this case, the controllers - register topics with the middleware they wish to receive. Publishers the individual sensors in this example register topics with the middleware they will send. If topics do not match, communication will not take place.

building. Similarly, a sensor does not need to know if it is sending its data to one or multiple controllers.

Specification of the topic's name is a key element in a data-centric approach to creating open systems. One could name each sensor's topic based on its unique location in the building — "Floor12Room3Sensor14" for example — but the controller would then need to be configured every time a sensor is added or removed from the system.

# **Data Type**

Specification of the topic's data type is equally as important as the topic's name. For this example, we are using Interface Definition Language (IDL) because it is an open standard and readily maps to XML and SQL semantics.

In the definition of the topic's type, one or more data elements can be chosen to be a "key." Keys provide scalability, and the communication infrastructure can use the key to sort and order data from many

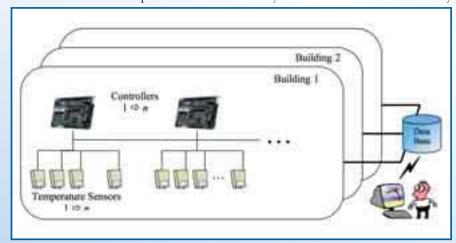


Figure 1. Distributed Temperature Control

Topics enable one to find specific information sources and sinks when architecting a loosely coupled system. A loosely coupled system is one in which you do not know *a priori* how many sensors or controllers there are going to be or where they all are. The controller can simply subscribe to "TempSensor," the topic's name, and receive all the sensor updates for that

sensors. In this example, without keys, one would need to create individual topics for each sensor. Topic names for these topics might be: Sensor\_1, Sensor\_2, and so on. Therefore, even though each topic is comprised of the same data type, there would still be multiple topics. With keys, there is only one topic, "TempSensor," used to report temperatures.

AFRL Technology Horizons, April 2006

www.afrlhorizons.com/et

ToC







# **Embedded Technology**

New sensors can be added without creating a new topic. The publishing application would just need to set a new ID when it was ready to publish. An application can also have a situation where there are multiple publishers of the same topic with the same key defined. This enables the application to provide redundancy. Using our example, if we put two sensors in the same room, giving them the same key value states that they are measuring the same piece of information. Managing redundancy, should one or both sensors report to the controller, is accomplished though Quality-of-Service (QoS).

# Quality-of-Service (QoS)

Data-centric communication provides the ability to specify various parameters like the rate of publication, rate of subscription, how long the data is valid, and many others. These QoS parameters allow system designers to construct a distributed application based on the requirements for, and availability of, each specific piece of data. A data-centric environment allows you to have a communication mechanism that is custom tailored to your distributed application's specific requirements, yet remains a loosely coupled design and architecture.

The ability to set QoS on a per-entity basis is a significant capability provided by DDS. Being able to specify different QoS parameters for each individual topic, publisher, or subscriber gives developers many options when designing their system. Through the combination of these parameters, a system architect can construct a distributed application to address an entire range of requirements, from simple communication patterns to complex data interactions.

The following examples briefly detail how one might leverage a few of the QoS features in DDS:

- DOMAIN. A Domain is the basic DDS construct used to bind individual publications and subscriptions together for communication. A distributed application can elect to use single or multiple domains for its data-centric communications. In the example, different buildings map to different Domains. Domains isolate communication, promote scalability, and segregate different classifications of data.
- PARTITION. The Partition QoS is a way to logically separate Topics within a Domain. The value is a string. If a subscriber sets this string, then it will only receive messages from publishers that have set the same string. In context of our example, partitions can be used to group sensors on different floors. For example, if we want to divide the building

34

into different zones, where each zone is regulated by a dedicated controller, the sensor and controller could set the partition to "Floor 1" and "Floor 1-6," respectively. Here the controller will receive data from all sensors on floors 1 through 6. So using partitions makes it easy to group what sensors are connected to a controller, and a controller can take over a different zone by changing or adding to its partition list.

- OWNERSHIP. The ownership QoS specifies whether or not multiple publishers can update the same data object and how you achieve fault-tolerance using DDS. Returning to our example, if we have multiple sensors in the same room and we only want to get data from the primary (as long as it is functioning), then the ownership QoS policy is set to "Exclusive," stating that only one sensor can update that keyed value. Setting the ownership policy to "Shared" is stating that we can have multiple sensors in the same room, reporting the same piece of keyed data. In this case, the controller would get updates from all sensors and treat the values as the same measurement.
- DURABILITY. The durability QoS specifies whether past samples of data will be available to newly joining subscribers. Considering our example, if a controller were to reboot rather than require all sensors to resend their data, or require the data to be sent at a periodic rate in case the systems reboots, one simply gets the latest published value for every attached sensor. This effectively decouples the system in time and provides a high degree of data integrity.
- HISTORY. History specifies how many data samples will be stored for later delivery. Specifically, a rebooted controller may want the last five samples from its sensors, so that it can make sure that readings are consistent.
- RELIABILITY. Finally, the reliability QoS may be set on a per topic basis and informs the middleware that the subscription should receive all data (no missed samples) from a publication even over non-reliable transports. For periodic publications, reliability generally doesn't need to be set since you can just get the updated value one sample period later. Although periodic sensor data doesn't need to be delivered reliably, synchronization commands between controllers in this example could be.

## **Database Integration**

The final element of our example system is the integration of real-time data and traditional relational databases. Since both these technologies are data-centric and complementary, they can be combined to enable a new class of applications. In particular, DDS can be used to produce a truly decentralized distributed database management system (DBMS), while DBMS technology can be used to provide persistence for DDS data.

IDL data models can be automatically and cleanly mapped to SQL table schemas. For example, the topic "TempSensor" becomes a table named "TempSensor" and the data contents, identified by the key, become rows in the table. Essentially, the database is simply another subscription to the sensors' update and automatically receives current data from all the distributed sensors. Changes to the database are pushed to entities that are interested in that particular topic/table name. Embedded applications don't need to know SQL or ODBC semantics, and the database applications don't need to know publish/subscribe se-

For true data integrity and scalability, databases should be distributed as well. RTI's SkyBoard solution implements a distributed shared database where fragments of the shared database are kept in the data caches of the hosts in the network on an as-needed basis. Thus the database becomes a combination of the data stores distributed throughout the system. When a node updates a table by executing a SQL INSERT, UPDATE, or DELETE statement on the data-cache, the update is proactively replicated to other hosts that access this table via real-time publish-and-subscribe messaging.

Finally, once data is automatically entered and maintained in a DBMS, using standard tools one can build a Web application that accesses and manipulates the database data. Thus the Web application does not need to know how many buildings, sensors, or controllers there are in the system. Nor does the Web application need to know the middleware specifics that the temperature control system is using to distribute data. The application can just use SQL and ODBC to read and change all of the available data in the system, decoupling implementation specifics across the system.

By starting with the data model and designing the systems following a netcentric approach, we demonstrated a system that seamlessly integrates a variety of different communication paradigms while still achieving a high degree of data integrity.

This article was written by Gordon Hunt, Principal Applications Engineer at Real-Time Innovations, Inc. of Santa Clara, CA. For more information, contact Mr. Hunt at Gordon. Hunt@rti.com or visit http://info.ims.ca/5657-402.

www.afrlhorizons.com/et

AFRL Technology Horizons, April 2006















